




Self-contained ice maker - Sprayer system Daily production up to 42 kg

| | |
|---------------|----------------------|
| Hotel | ████████████████████ |
| Restaurant | ██████████████████ |
| Fast food | ██████████████ |
| Bar | ██████████████████ |
| Disco | ██████████████████ |
| Fish market | ██████████████ |
| Supermarket | ██████████████ |
| Medical & SPA | ██████████████ |
| Industry | ██████████████ |

► Position n°



► Features & Plus

- Compact and crystal cube
- AISI 304 SS Scotch Brite finish 
- Tropical class +43°C 
- Adjustable Stainless Steel feet
- Removable and cleanable air filter
- Air cooling system
- Easy cleanable internal rounded surfaces 
- HCFC-Free insulated storage 
- RoHS Free 
- Disappearing insulated door
- Electromechanical operation 
- ON-OFF rocker switch 
- Standard and special voltages
- Drain Pump fitted



AISI 304 SS Scotch Brite finish



Adjustable Stainless Steel feet




Removable and cleanable air filter



Disappearing insulated door

► Available ice cube size



► Prod. 24h

| °C | Air temp. | | Water temp. | | kg | lbs |
|----|-----------|-------|-------------|-------|----|-----|
| | 10° C | 50° F | 7° C | 45° F | | |
| | 21° C | 70° F | 15° C | 60° F | | |
| | | | | | 42 | 93 |
| | | | | | 35 | 77 |

3 Years Warranty
subject to limitations

► Certifications available for this model






Ice Cube

CB 316A-DP



Self-contained ice maker - Sprayer system Daily production up to 42 kg

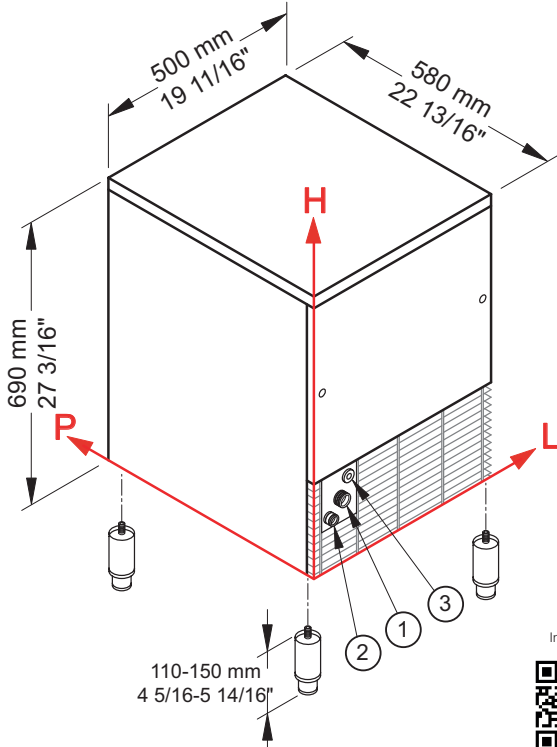

► Working conditions

- Location: **Indoor**

| | Min | Max |
|----------------------|-----------------|-----------------|
| Ambient temperature | +10° C / +50° F | +43° C / 110° F |
| Water temperature | +3° C / +37° F | +32° C / +90° F |
| Voltage | -10% | +10% |
| Water inlet pressure | 1bar (14 psi) | 6bar (84 psi) |

► Performances

| Air temperature | Water temperature | Water temperature | | | | | |
|-----------------|-------------------|-------------------|--------|-------|--------|-------|-------|
| | | 7° C | 45° F | 15° C | 60° F | 21° C | 70° F |
| 10° C | 42 kg | | | | | | |
| 50° F | 93 lbs | | | | | | |
| 21° C | | | 35 kg | | | | |
| 70° F | | | 77 lbs | | | | |
| 32° C | | | | | 33 kg | | |
| 90° F | | | | | 73 lbs | | |

► Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water in.: 111 mm / 4 6/16" - 196 mm / 7 11/16" - 3/4" ② Water out.: 49 mm / 1 15/16" - 151 mm / 5 15/16" - 24 mm / 15/16"
- ③ Electrical connections: 156 mm / 6 2/16" - 232 mm / 9 2/16"

► Technical information

| | |
|---------------------------|--|
| Production in 24h | 35 kg / 77 lbs |
| Store capacity, up to | 16 kg / 35 lbs |
| Cooling system | A |
| Kind of cube | D-13g |
| Refrigerant | R452A |
| Standard voltage | 220-240 V ~ 50 Hz |
| Average power consumption | 370 W |
| Fuse | 10 A |
| Finish | AISI 304 stainless steel, scotch brite |

| | |
|----------------------------|--------------------------------|
| Water consumption | A:3,3 l/kg - 39,5 gal/100 lbs |
| | W: 13 l/kg - 155,8 gal/100 lbs |
| Sizes (L-P-H mm) | 500 - 580 - 690 |
| (L-P-H in) | 19 11/16 - 22 13/16 - 27 3/16 |
| Sizes with pack (L-P-H mm) | 550 - 630 - 880 |
| (L-P-H in) | 21 10/16 - 24 13/16 - 34 10/16 |
| Net weight | 48 kg / 106 lbs |
| Gross weight | 56 kg / 123 lbs |

All the technical information need to be considered at the following conditions:

- Standard Cube (18 g)
- Ambient temperature +21° C
- Water temperature +15° C
- Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Rev. 04 - Issued September 2019



www.cannindustries.com.au

